


Stopper valve, push-in L-fitting

»blue series«



Art. No. 110196 Type No. 198.186

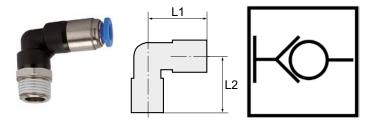

Exemplary illustration

The air supply is completely shut off as soon as the hose is disconnected from the union. The flow rate is only guaranteed if the hose is securely inserted.

Discontinued product. No longer available. New product151475 (198.186-2)

Technical data

Working pressure	0 - 10 bar				
Temperature range	0 to 60 °C				
Series	Blue series				
Material	Plastic and nickel-plated brass				
Medium	Compressed air				
Sealant	NBR				
Sleeve	Plastic blue				
Applications	Compressed air systems				
Recommended hose	PU or PA (nylon)				
Function	Self-locking				
Thread form	Conical male thread				
Standard thread	ISO 7-1				
Version	PTFE coated				
Design	Swivel type				
Thread	R 1/8				
For tube O.D.	6 mm				
L1	29.4 mm				
L2	24.2 mm				
a/f	12 mm				

 $The \ suitability \ test \ for \ the \ use \ with \ alternative \ specifications \ is \ the \ user's \ responsibility.$




Commercial data

Customs tariff number	39174000
Country of origin	CN
eCl@ss 5.1.4	27294201
eCl@ss 9.0	27294201
UNSPSC_Code_v190501	27131613
UNSPSC_CodeDesc_v190501	Air coupling

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

Dimensions



Thread	Standard thread	For tube O.D.	F	a/f	L1	L2	D1
		mm	mm	mm	mm	mm	mm
R 1/8	ISO 7-1	6	7.5	12	29.4	24.2	13.0