

# **Pressure regulator**

for potable water, DVGW-tested acc. to EN 1567

#### 

Art. No. 146316 Type No. DRTWR.G12.1-8B



Exemplary illustration

Diaphragm pressure regulator made of red brass with pressure-reduced single-seated valve and built-in strainer. The regulator protects domestic water installations as well as commercial and industrial systems against excessive supply pressure.

### **Technical data**

Max. input pressure	40 bar
Operating temperature	-20 to 95 °C
Operating temperature max. drinking water	80 °C
Control range	1 - 8 bar
Thread	G 1/2 IT
DN	15
a/f	28 mm
Flow rate kvs value	3 m³/h
Medium	potable water, nitrogen, argon, neutral and non-adhesive liquids, compressed air and neutral gases
Housing	red brass (CC499K)
Internal parts	red brass (CC499K) and stainless steel (1.4404)
Pressure setting	adjusting screw
Pressure spring	spring steel, rust-protected
Screen	stainless steel
Mesh size strainer	0.60 mm
A	85.0 mm
C	33.0 mm
D	102.0 mm

Size R 2 and other control range available on request.

The following approvals are available on request:

- DIN-DVGW type examination (up to 80 °C)

- ACS approval

- WRAS approval (up to 85 °C)

- SINTEF approval


- PZH approval




## **Commercial data**

84811099
DE
37011108
37011108
41112404
Pressure regulator

### Flow chart

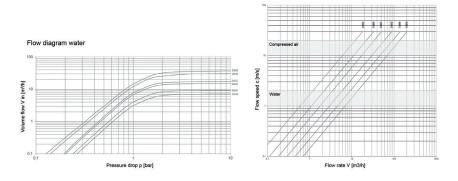

## Dimensions

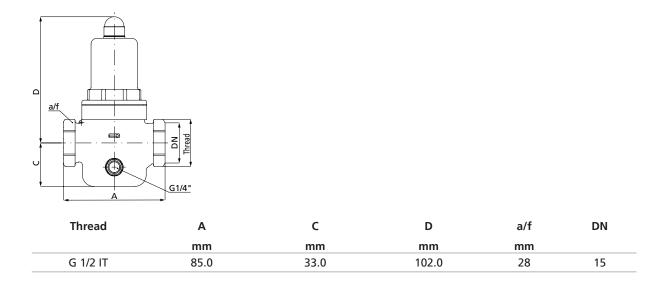



# **Application examples**

Use of pressure reducers if a certain pressure must not be exceeded on the outlet side of the pipe network despite different pressures on the inlet side

- potable water supply in accordance with DIN 1988
- service water supply in industrial and building technology
- snowmaking systems
- fire extinguishing technology and sprinkler systems
- shipbuilding and offshore systems

#### Accessories

	Art. No.	Туре No.
Reducing nipple G 1/2 ET to G 1/4 IT	134445	MS251K1214

### **Spareparts**

	Art. No.	Type No.
Valve insert for G 1/2 and G 3/4	146312	VEDRTWR.G12.G34
Standard pressure gauge	101677	206-KD