


Body and ball  
Wing lever  
Ball seal  
Stem seal  
Medium and ambient temperature  
Operating pressure


Nickel-plated brass  
Plastic  
PTFE  
NBR  
-10 °C to +80 °C  
max. 10 bar

### Mini ball valves with wing lever

Art. No.	Ident No.	Thread	DN (ØP)	a/f mm	L mm	L1 mm	H mm	I mm	I1 mm
371.01	103347	Rp 1/8 female	5.5	14	36.5	19.0	21.5	8.0	8.0
371.02	103348	Rp 1/4 female	5.5	14	43.0	19.0	21.5	11.0	11.0
371.02-1	103349	Rp 3/8 female	7	18	48.0	18.0	22.5	11.5	11.5
371.02-2	103350	Rp 1/2 female	10	22	59.0	25.0	32.0	15.0	15.0
371.03	103351	R/Rp 1/8 male / 1/8 female	5.5	14	35.5	19.0	21.5	8.0	8.0
371.04	103352	R/Rp 1/4 male / 1/8 female	5.5	14	38.0	19.0	21.5	11.0	8.0
371.05	103353	R/Rp 1/4 male / 1/4 female	5.5	14	40.5	19.0	21.5	11.0	11.0
371.06	103354	R/Rp 3/8 male / 1/4 female	5.5	14	41.5	19.0	21.5	11.5	11.0
371.07	103355	R/Rp 3/8 male / 3/8 female	8	18	44.5	19.5	22.5	11.5	11.5
371.09	103356	R/Rp 1/2 male / 1/2 female	10	22	55.5	26.5	32.5	15.0	15.0

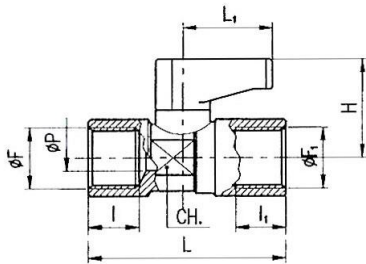

371.02

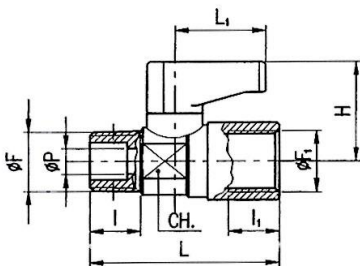

371.05